

ACC. PP PROŠIRENJE: ACAB-EA05

Garancija: 5 godina

NIŽE U ORIGINALU

ACAB-EA05 Enhanced Alarm Output and Integrated Fire Control Expansion Controller

I. Overview

Fire alarm output and the expansion of the joint board, it is one of the access controller add-on modules, the software settings, mainly used to provide fire and alarm signal output of the joint. The module has a practical, simple interface, the design performance characteristics of stability. With its power and relay instructions, may direct communication failures, is a good cost performance of the joint extension.


II. The characteristics of module

Four-alarm output, free to the host controller to the definition of a door and the door to a number of features. Can connect the output signal fire, the Fire received the signal controller automatically open their doors to all and have a fire alarm records available for consultation.

III. Support for the 'illegal intrusion'

and 'the door is not closed for a long time' and 'coercion to enter,' and 'linkage to open the door' and 'invalid card' and 'fire' alarm linkage output, and so on.

IV. Can be set for each output of the delay time 0-6000 seconds.

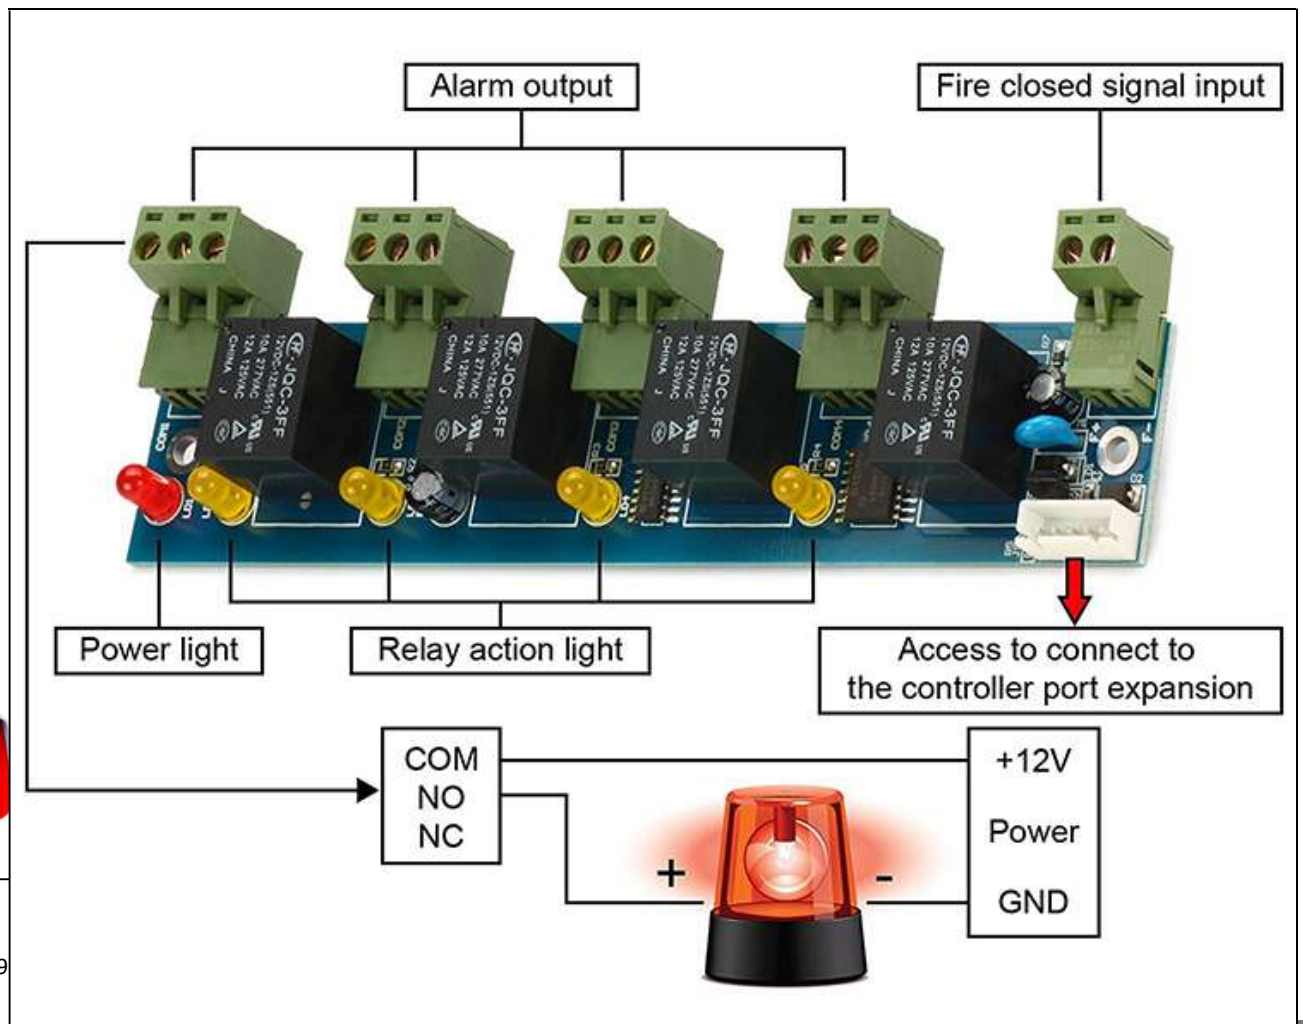

+381 11 355 7599
+381 63 598 017
office@aspekt.rs

Model No.	ACAB-EA05
Product Name	Enhanced Alarm Output and Integrated Fire Control Expansion Panel
Basic Info	
Unit Packing Way	Brown box
Accessories	User Manual, warranty card, necessary parts for connecting panel
Function Introduction	
Applicable to access controller	ACAB-R01, ACAB-R02, ACAB-R04, ACAB-T01, ACAB-T02, ACAB-T04, ACAB-001, ACAB-002, ACB-004.
Can Control	invalid break-in alarm, long time unlocking alarm, intimidation break-in alarm, unlocking linkage output, invalid card swiping alarm, integrated fire control alarm
Should pay attention to	This enhanced Alarm Output and Integrated Fire Control Expansion Panel only can compete with the ACB series controller, and the software be V6.6 or higher version.
Output and input	1-way input and 4-way alarm output, You can specify which function to which door of the controlled area, Can connect the fire control output, when the fire signal received, doors in the controlled area will be open automatically, and five-alarm will be recorded.
Other	Allow changing anti-intimidation password
	Can set a long time unlocking alarm time: 0-6000 seconds
	Can set the time delay of each output from 0 to 6000



+381 11 355 7599
+381 63 598 017
office@aspekt.rs