
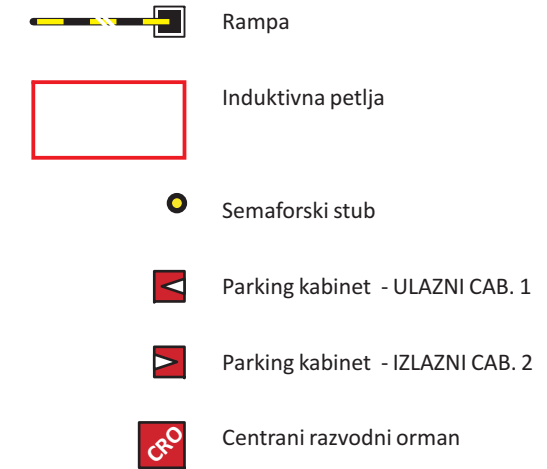
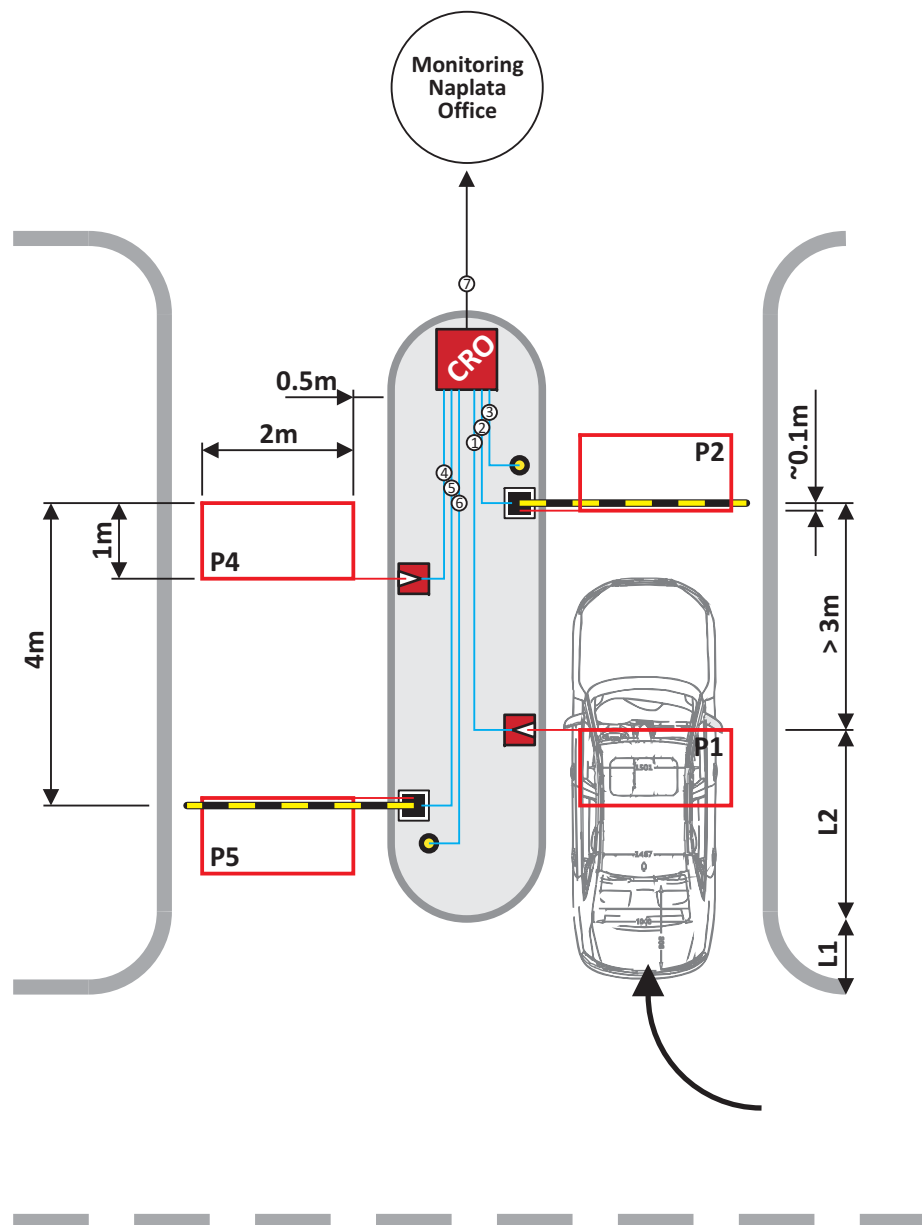


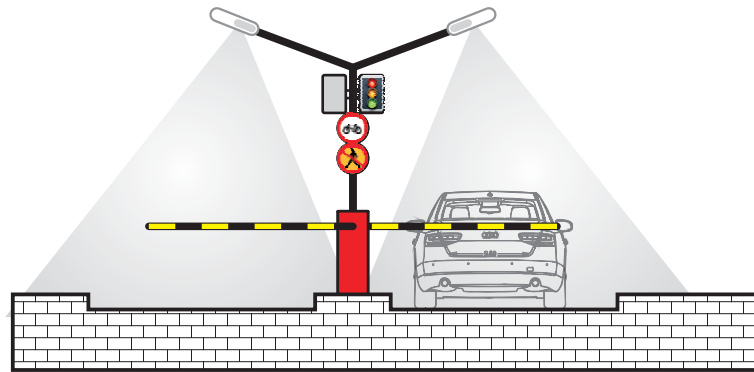

- ① **LOKACIJA CAB. 1 DO CRO**
SiSi-J: 1 x 3 x 1.50mm² (Obavezno)
LIHCH FE 180 E 90: 1 x 2 x 0.75mm² (P1), "twiste pair"
LiHH: 1 x 2 x 0.50mm² (LED MARK. 1)
LiHH: 1 x 3 x 0.50mm² (MINI SEMAFOR)
LiHH: 1 x 2 x 0.50mm² (LED RASVETA KABINET)
LiHH: 1 x 4 x 0.34mm² (TASTER sa LED indikacijom)
LiHH: 1 x 7 x 0.50mm² (RFID "wiegand")

SiSi-J: 1 x 2 x 1.00mm² (Kiosk Printer 24VDC)
LiHH: 1 x 2 x 0.50mm² (Printer "paper end")
LiHH: 1 x 2 x 0.50mm² (Printer "paper jam")
LiHH: 1 x 2 x 0.50mm² (Printer "rezerva")
1 x UTP/SFTP (Printer)

1 x INTERFON 1 - ULAZ (zavisi od odabranog)
2 x UTP/SFTP (Rezerva)
- ② **LOKACIJA RAMPA 1 DO CRO**
SiSi-J: 1 x 3 x 1.5mm² (Rampa 1)
LIHCH FE 180 E 90: 1 x 2 x 0.75mm² (P2) "twiste pair"
LiHH: 1 x 4 x 0.50mm² (CC)
LiHH: 1 x 2 x 0.50mm² (Boom "Down")
LiHH: 1 x 2 x 0.50mm² (Boom "Up")
LiHH: 1 x 4 x 0.50mm² (Photo cell 1)

2 x UTP/SFTP (Rezerva)
- ③ **LOKACIJA SEMAFOR 1 DO CRO**
SiSi-J: 1 x 3 x 1.00mm² (Semafor 1, 24VDC)
1 x UTP/SFTP (Rezerva)
- ④ **LOKACIJA - CAB 2 DO RO**
SiSi-J: 1 x 3 x 1.50mm² (Obavezno)
LIHCH FE 180 E 90: 1 x 2 x 0.75mm² (P4), "twiste pair"
LiHH: 1 x 2 x 0.50mm² (LED MARK. 2)
LiHH: 1 x 3 x 0.50mm² (MINI SEMAFOR)
LiHH: 1 x 2 x 0.50mm² (LED RASVETA KABINET)
LiHH: 1 x 7 x 0.50mm² (RFID "wiegand")
LiHH: 1 x 7 x 0.50mm² (barcode scanner "wiegand")

1 x INTERFON 2 - IZLAZ (zavisi od odabranog)
2 x UTP/SFTP (Rezerva)
- ⑤ **LOKACIJA RAMPA 2 DO RO**
SiSi-J: 1 x 3 x 1.5mm² (Rampa 2)
LIHCH FE 180 E 90: 1 x 2 x 0.75mm² (P5) "twiste pair"
LiHH: 1 x 4 x 0.50mm² (CC)
LiHH: 1 x 2 x 0.50mm² (Boom "Down")
LiHH: 1 x 2 x 0.50mm² (Boom "Up")
LiHH: 1 x 4 x 0.50mm² (Photo cell 1)

2 x UTP/SFTP (Rezerva)
- ⑥ **LOKACIJA SEMAFOR 1**
SiSi-J: 1 x 3 x 1.00mm² (Semafor 2)
1 x UTP/SFTP (Rezerva)
- ⑦ **LOKACIJA OD CRO NA DALJE**
LiHH: 1 x 4 x 0.50mm² (CC)
1 x UTP/SFTP od Printera (USB Extender)
1 x UTP/SFTP od Switch-a
2 x UTP/SFTP (Rezerva)

