

PROIZVOD: QRS-QAC20

BARCODE (QR) SKENER SA TASTATUROM I RFID ČITAČEM KARTICA



NIŽE U ORIGINALU


Products Features	STAND ALONE; WG (26/34) OUT
Management	6 digit Password
App	Quicklopen
Reading card type	MF Card
Reading Range	MF:1~3cm, QR Code:1~20cm
Card Capacity	≥10000 cards
Door opening mode	App, Card, Password
Prompt mode	Buzzer sound, Blue work light on, green light flashes
Camera pixel	300000 pixels
Scan resolution	640*480
Reading angle	Rotate 360 °, tilt ± 45 °, deflection ± 45 °
Keypad Type	Press
Open door time	0~99s
Door ell function	with Doorbell button
Electrical parameters	Work voltage; DC12V
Work current	100mA
Appearance and packing	Color and material; Black Plastic ABS
Size	120×80×18 (mm)
Install hole space	60 mm
Packing list	Dynamic QR Code Standalone Controller, 8P wire, manual ×1
Working environment	Working temperature; -10~60°C
Working humidity	5%-85%



+381 11 355 7599
 +381 63 598 017
 office@aspekt.rs

Wiring diagram – 8 wires – STAND ALONE

RED	12VDC	POWER
BLACK	GND	
GREEN	OPEN	EXIT BUTTON
BLACK	NO	
WHITE	COM	RELAY SIGNAL OUTPUT
YELLOW	NC	
BLUE	BEEP	
YELLOW	BEEP	DOORBELL

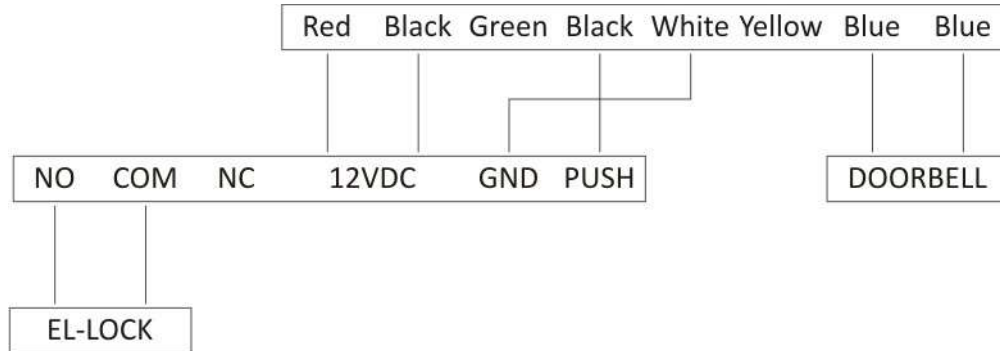

Wiring diagram – 7 wires – CARD READER

RED	12VDC	CARD READER
BLACK	GND	
GREEN	D0	
WHITE	D1	
BLUE	LED	
YELLOW	BEEP	
GRAY	WIEGAND 26/34	

KRAJ



+381 11 355 7599
+381 63 598 017
office@aspekt.rs