

# RFID ČITAČ: KAR101

PART No: KAR101EM; KAR101FM

## NIŽE, U ORIGINALU

**Model No.: KAR101 EM, MF**


**Introduction:**

KAR101E: 125KHz Proximity card reader


KAR101M: 13.56MHz Mifare card reader

**Features:**

- > 125KHz Proximity /13.56MHz Mifare Card Reader
- > Read Range: Up to 10cm (125KHz) / 5cm (13.56MHz)
- > 26/34bit Wiegand (default)
- > Easy to install on Metal Door Frame or Mullion
- > External LED Control
- > External Buzzer Control
- > Indoor / Outdoor Operation
- > Solid Epoxy Potted
- > Waterproof IP65
- > Reverse Polarity Protection

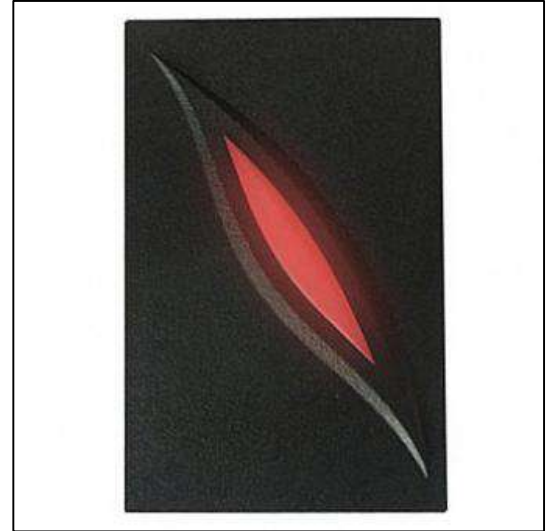

Read Range	KAR101cm: Up to 10CM, KR101MF: Up to 5cm
Reading Time (Card)	≤300ms
Power / Current	DC 6-14V / Max.70mA
Input Port	2ea (External LED Control, External Buzzer Control)
Output Format	26bit/34bit Wiegand (default)
LED Indicator	2 Colour LED Indicators(Red and Green)
Beeper	Yes
Operating Temperature	-20° to +65°C
Operating Humidity	10% to 90% relative humidity non-condensing
Colour	Black
Material	ABS+PC with texture
Dimension(W x H x T)mm	43 X 77 X 17mm
Weight	50g
Index of Protection	IP65

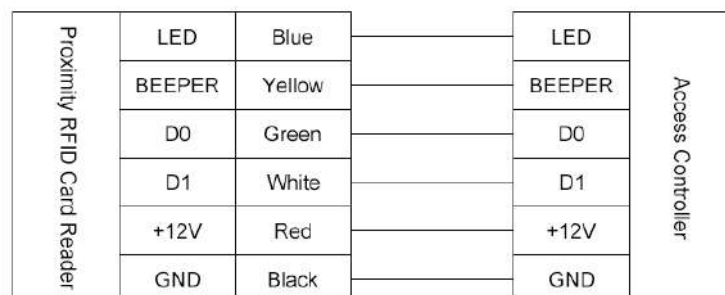

+381 11 355 7599  
+381 63 598 017  
office@aspekt.rs