



- ① **SVE OPCIJE (WIEGAND PODESIV)**
SiSi-J: 1 x 3 x 1.50mm²
LiYCY: 1 x 7 x 0.34mm² za RFID Čitač A “wiegand”
LiYCY: 1 x 7 x 0.34mm² za barcode skener A “wiegand”
LiYCY: 1 x 7 x 0.34mm² za RFID Čitač B “wiegand”
LiHCH: 1 x 4 x 0.50mm² za open A / open B (ACC.)
LiHCH: 1 x 3 x 0.50mm² za TASTER open A i B Smer (CC)
LiHCH: 1 x 3 x 0.50mm² za brojače A i B

1 x UTP/SFTP (Rezerva)

- SVE OPCIJE (WIEGAND FIKSNI)**
SiSi-J: 1 x 3 x 1.50mm²
LiYCY: 1 x 5 x 0.34mm² za RFID Čitač A “wiegand”
LiYCY: 1 x 5 x 0.34mm² za barcode skener A “wiegand”
LiYCY: 1 x 5 x 0.34mm² za RFID Čitač B “wiegand”
LiHCH: 1 x 4 x 0.50mm² za open A / open B (ACC.)
LiHCH: 1 x 3 x 0.50mm² za TASTER open A i B Smer (CC)
LiHCH: 1 x 3 x 0.50mm² za brojače A i B

1 x UTP/SFTP (Rezerva)

- ② **STANDARD (1) - BARCODE KARTA & RFID KARTICA (ULAZAK) / TASTER (IZLAZAK)**
SiSi-J: 1 x 3 x 1.50mm²
LiYCY: 4 x 5 x 0.34mm²
1 x UTP/SFTP (Rezerva)

- ③ **STANDARD (2) - BARCODE KARTA (ULAZAK) / TASTER (IZLAZAK)**
SiSi-J: 1 x 3 x 1.50mm²
LiHH: 3 x 5 x 0.50mm²
1 x UTP/SFTP (Rezerva)


- ④ **STANDARD (2) - RFID (ULAZAK) / RFID (IZLAZAK)**
SiSi-J: 1 x 3 x 1.50mm²
LiYCY: 4 x 5 x 0.34mm²
1 x UTP/SFTP (Rezerva)

- ⑤ **VERZIJA - SLOBODAN PROLAZ SAMO U JEDNOM SMERU**
SiSi-J: 1 x 3 x 1.50mm²
LiHCH: 1 x 5 x 0.50mm²
1 x UTP/SFTP (Rezerva)

- ⑥ 1 x UTP/SFTP

- ⑦ **VERZIJA - SAMO JEDAN SMER - BARCODE**
SiSi-J: 1 x 3 x 1.50mm²
LiHCH: 2 x 5 x 0.50mm²
1 x UTP/SFTP (Rezerva)

- ⑧ **KOMANDNA KONZOLA**
LiHCH: 3 x 5 x 0.50mm²
1 x UTP/SFTP (Rezerva)

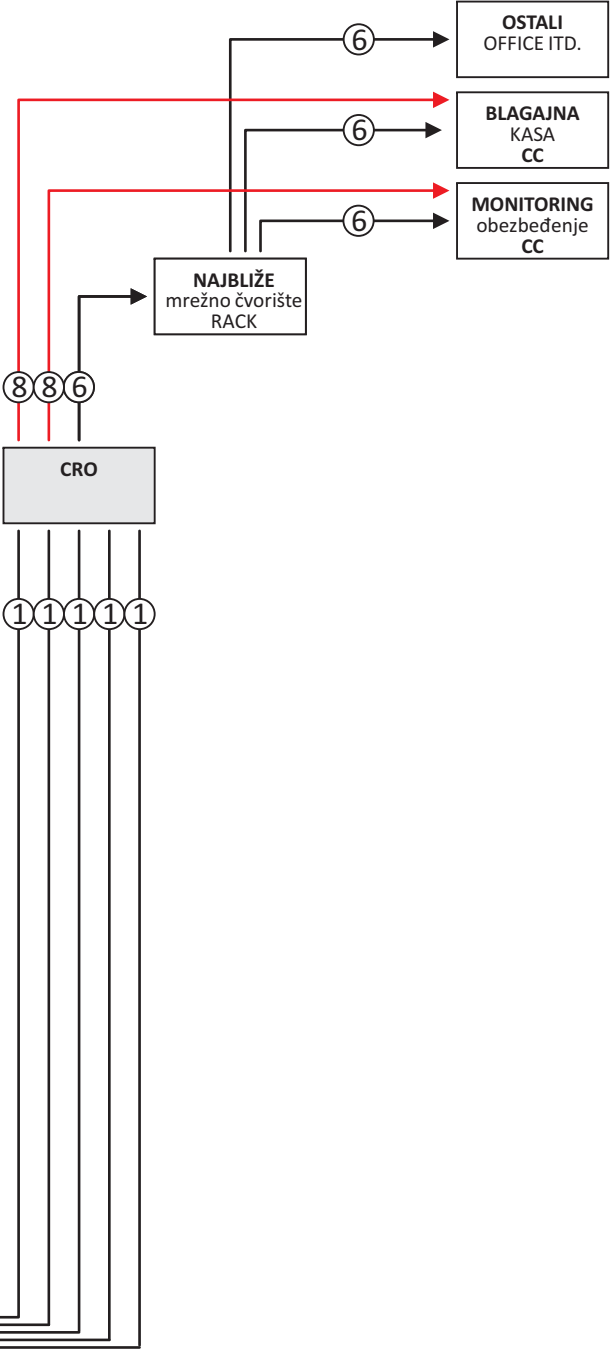

PROLAZ ZA OSOBE SA
POSEBNIM POTREBAMA



STANDARDAN
PROLAZ

