

RFID ČITAČ PACD-100A RS485 (WG)

PART No: PACD-100A-MF, ili PCDA-1001-EM)

NIŽE, U ORIGINALU



TECHNICAL SPECIFICATION

Product material	PVC
Sensing distance	0-15cm
Card type	ID/IC card
Card reading speed	<0.2S
Operating Voltage	DC 5~16V
Working current	<25mA
Operating temperature	-30C~85C
Working humidity	10%~ 90%
working frequency	ID125Khz/IC13.56Mhz
Communication Interface	WG 26~34/RS485/RS232/TTL frequency, etc. optional




PCD-100A OUTPUT (YOU CAN CHOOSE ANY OUTPUT WAY)
ID RS485(initiative)
ID RS485(passive)



+381 11 355 7599
+381 63 598 017
office@aspekt.rs

WIRING DIAGRAMS

SWIPE DISTANCE

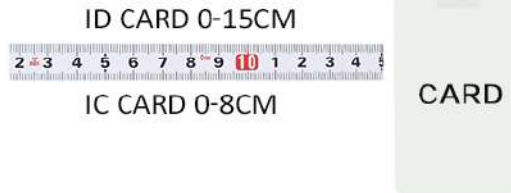

Note: There are errors in different card swiping distances according to different card sizes and cards made by different manufacturers

WIRING INSTRUCTIONS

WG26-34

WG CARD READER	RED		DV 12V	ACCESS CONTROLLER
	BLACK		GND	
	GREEN		D0	
	WHITE		D1	
	BLUE		LED	
	YELLOW		BEEL	
	ASH		WG34	

● When the gray is connected to GND, the output becomes WG34, and when not connected to the gray, the output is WG26

RS485

485 CARD READER	RED		DV 12V	HOST COMPUTER
	BLACK		GND	
	GREEN		485+	
	WHITE		485-	

RS232/UART

232 CARD READER	RED		DV 12V	HOST COMPUTER
	BLACK		GND	
	GREEN		485+	

 
+381 11 355 7599
+381 63 598 017
office@aspekt.rs