

## A6000-F

Otisak prsta (1)

Šifra (Code) (2)


Ključ (3)



Anti-friction latch



Distance from door edge: 50/60/70

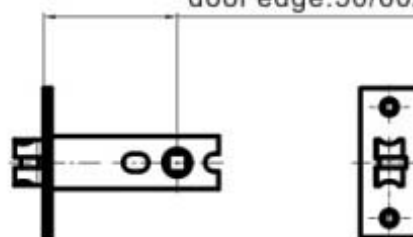

Material	Flank plate	Stainless steel 304
	Latch & Bolt	Stainless steel 304
	Cover	Stainless steel 201

Single latch

CE FC RoHS COMPLIANT ISO 9001(2008)

Model	Opening ways	Raw material	Dimension (mm)
6000-F	Fingerprint, Password, Mechanical key	Zinc alloy	L70*H168
Optional colors	Fingerprint device	Type of inputting password	Screen
Silver, Golden	Auto-focus fingerprint identification	4 Digits Physical Keypad	No
Total fingerprint user	Reaction time	Mortise	Cylinder
55 users	≤ 0.5S	Single latch	Level B
Battery	External battery	Dynamic currency	Static currency
4PCS AA	9V	≤200mA	≤10mA
Working temperature	Humidity	Applicable door	Door thickness
-10°C ~ 60°C	15%~90% RH	Wooden door, Aluminium door	33 mm~ 85 mm


## THE SAME FINGERPRINT LOCK NOT THE SAME TECHNOLOGY

### THE LATEST TECHNOLOGY OF IDENTIFYING FINGERPRINT WITH AUTOMATIC FOCUS COMPARABLE WITH SLR CAMERA

adopts the exclusive patent technology of identifying fingerprint with automatic focus, this technology is similar to the SLR camera's, which can make the fingerprint texture more clear after focusing and can make comparisons repeatedly from many different ways. Therefore, it have a much lower false rejection rate (<0.1%) and false acceptance rate (<0.001%), which can process the efficient data more efficiently.

#### THE PERFECT IDENTIFICATION

- ✓ Fatter or thinner
- ✓ Kid grow up
- ✓ Finger gets injured
- ✓ Finger gets cracked
- ✓ Finger gets dirty

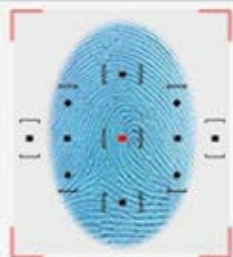

OURS

#### IDENTIFICATION FROM OTHER BRAND

- ✗ Fatter or thinner
- ✗ Kid grow up
- ✗ Finger gets injured
- ✗ Finger gets cracked
- ✗ Finger gets dirty



OTHERS