

**KATALOG
INTELIGENTNIH
HOTELSKIH BRAVA**






N-A6100SL-D



MODELI: EURO mortise, "pasuju" na plot (krilo) vrata u skladu sa crtežom Mortise 6#

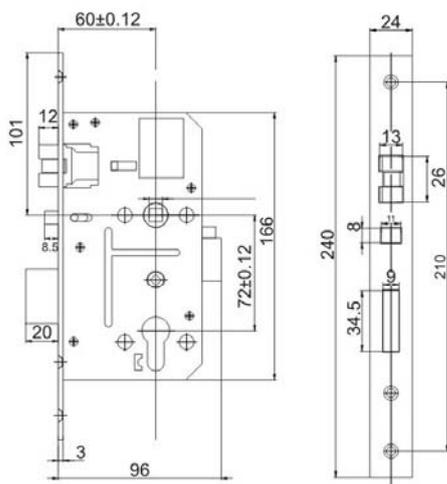

Mortise 6#



Namena
 hotele, motele, studentske, učeničke i domove
 penzionera, kancelarije, škole, bolnice, veće rezidencijalne
 objekte, ...

Materijal: nerđajlići čelik, detaljne tehničke karakteristike
 publikovali smo na:

www.aspekt.rs

u sekciji [Hotelske brave]


[EN] N-A918

Applicable card	TEMIC contactless RF card or MIFARE ONE contactless RF card.
Power supply	4pcs standard AA alkaline batteries.
Battery life	About 10 months in normal state, depending on usage and climatic conditions.
Low voltage warning	When power's voltage is less 4.5V, there will be warning when unlock. The lock still can be unlocked about 100 times before the batteries are replaced.
Static consumption	12uA
Dynamic consumption	200mA
Open time	The lock will be locked again automatically 7 seconds after unlocking.
Reliability of card operation	No accident for 1000 times of continuous card operation.
Emergency unlocking	The door can be unlocked by Master Card or Mechanical key even though the deadbolt works.
Panel size	285mm(Height) ×70mm (Width) ×26mm (Thickness)
Mortise size	204mm(Height)×106mm (Width)×23mm (Thickness)
Weight	4.0Kg
Material	Alloy
Handle orientation	left hand push to open, right hand push to open; left hand pull to open, right hand pull to open.
Installation request	To be installed on the door, with the door thickness between 36mm to 90mm, and if the door surface is decorated, the distance between the decoration edge to the door edge must be over 110mm.



[EN] N-A918-2

Applicable card	TEMIC contactless RF card or MIFARE ONE contactless RF card.
Power supply	4pcs standard AA alkaline batteries.
Battery life	About 10 months in normal state, depending on usage and climatic conditions.
Low voltage warning	When power's voltage is less 4.5V, there will be warning when unlock. The lock still can be unlocked about 100 times before the batteries are replaced.
Static consumption	12uA
Dynamic consumption	200mA
Open time	The lock will be locked again automatically 7 seconds after unlocking.
Reliability of card operation	No accident for 1000 times of continuous card operation.
Emergency unlocking	The door can be unlocked by Master Card or Mechanical key even though the deadbolt works.
Installation request	To be installed on the door, the door thickness for lock with ANSI mortise is between 36mm to 100mm, for lock with Euro mortise is between 32mm to 100mm; if the door surface is decorated, the distance between the decoration edge to door edge for lock with ANSI mortise must be over 110mm, for lock with Euro mortise must be over 95mm.

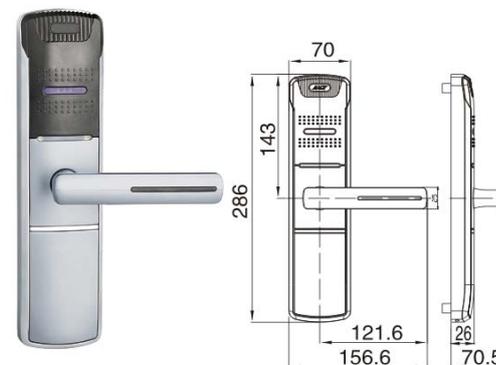

[EN] **N-A918-3**

Applicable card	TEMIC contactless RF card or MIFARE ONE contactless RF card.
Power supply	4pcs standard AA alkaline batteries.
Battery life	About 10 months in normal state, depending on usage and climatic conditions.
Low voltage warning	When power's voltage is less 4.5V, there will be warning when unlock. The lock still can be unlocked about 100 times before the batteries are replaced.
Static consumption	12uA
Dynamic consumption	200mA
Open time	The lock will be locked again automatically 7 seconds after unlocking.
Reliability of card operation	No accident for 1000 times of continuous card operation.
Emergency unlocking	The door can be unlocked by Master Card or Mechanical key even though the deadbolt works.
Panel size	286mm(Height) ×70mm (Width) ×26mm (Thickness)
Mortise size	ANSI mortise 204mm(Height)×106mm (Width)×23mm (Thickness) Euro mortise 230mm(Height)×80mm (Width)×16mm (Thickness)
Weight	4.0Kg
Material	Alloy
Handle orientation	left hand push to open, right hand push to open; left hand pull to open, right hand pull to open.

Installation request


To be installed on the door, the door thickness for lock with ANSI mortise is between 36mm to 100mm, for lock with Euro mortise is between 32mm to 100mm; if the door surface is decorated, the distance between the decoration edge to door edge for lock with ANSI mortise must be over 110mm, for lock with Euro mortise must be over 95mm.



detaljnije www.aspekt.rs


[EN] **N-A968**

Applicable card	TEMIC contactless RF card or MIFARE ONE contactless RF card.
Power supply	4pcs standard AA alkaline batteries.
Battery life	About 10 months in normal state, depending on usage and climatic conditions. When power's voltage is less 4.5V, there will be warning when Low voltage warning unlock. The lock still can be unlocked about 100 times before the batteries are replaced.
Static consumption	12uA
Dynamic consumption	200mA
Open time	The lock will be locked again automatically 7 seconds after unlocking.
Reliability of card operation	No accident for 1000 times of continuous card operation.
Emergency unlocking	The door can be unlocked by Master Card or Mechanical key even though the deadbolt works.
Installation request	To be installed on the door, with the door thickness between 33mm to 85mm, and if the door surface is decorated, the distance between the decoration edge to the door edge must be over 86mm.
Panel size	168mm(Height) ×70mm (Width) ×59mm (Thickness)
Mortise size	Standard single latch 60mm
Weight	2.5Kg
Material	Alloy
Handle orientation	left hand push to open, right hand push to open; left hand pull to open, right hand pull to open.

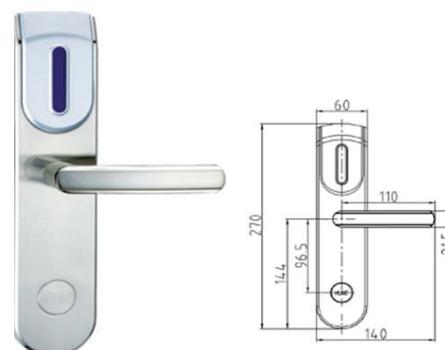

[EN] SERIJA N-A929

Applicable card	TEMIC contact less RF card or MIFARE ONE contact less RF card.
Power supply	4pcs standard AAA alkaline batteries.
Battery life	About 10 months in normal state, depending on usage and climatic conditions.
Low voltage warning	When power's voltage is less 4.5V, there will be warning when unlock. The lock still can be unlocked about 100 times before the batteries are replaced.
Static consumption	12uA
Dynamic consumption	200mA
Open time	The lock will be locked again automatically 7 seconds after unlocking.
Reliability of card operation	No accident for 1000 times of continuous card operation.
Emergency unlocking	The door can be unlocked by Master Card or Mechanical key even though the deadbolt works.
Installation request	It is especially good for old lock project, replace old mechanical lock easy, can without changing mortise or changing door. To be installed on the door, with the door thickness between 28mm to 85mm.
Panel size	270mm (Height) × 73.8mm (Width) × 16.5mm (Thickness).
Mortise size	5072/5085/5572/6072/6085.
Weight	2.5Kg
Material	Stainless Steel 304
Handle orientation	Left hand push to open, right hand push to open; left hand pull to open, right hand pull to open.

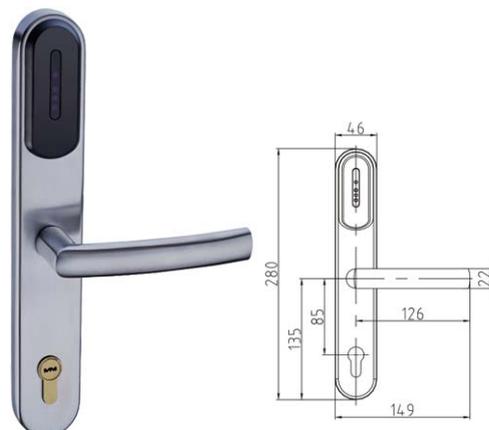

SERIJA 6000

Applicable card	TEMIC contact less RF card or MIFARE ONE contact less RF card.
Power supply	4pcs standard AA alkaline batteries.
Battery life	About 10 months in normal state, depending on usage and climatic conditions.
Low voltage warning	When power's voltage is less 4.5V, there will be warning when unlock. The lock still can be unlocked about 100 times before the batteries are replaced.
Static consumption	12uA
Dynamic consumption	200mA
Open time	The lock will be locked again automatically 7 seconds after unlocking.
Reliability of card operation	No accident for 1000 times of continuous card operation.
Emergency unlocking	The door can be unlocked by Master Card or Mechanical key even though the deadbolt works.
Installation request	To be installed on the door, with the door thickness between 33mm to 5mm, and if the door surface is decorated, the distance between the decoration edge to the door edge must be over 86mm.
Panel size	168mm(Height) × 70mm (Width) × 59mm (Thickness)
Mortise size	Standard single latch 60mm
Weight	2.5Kg
Material	Alloy
Handle orientation	Left hand push to open, right hand push to open; left hand pull to open, right hand pull to open.

