




# RFID ČITAČI

PART No: PACD-01

## NIŽE, U ORIGINALU

Dual Frequency RFID Access Reader for 3working Way  
Material: Acrylic panel  
Wiegand 26/34 output  
Dimension: 86x86x8mm  
Voltage: DC9~15V  
Working Frequency: 125KHz & 13.56MHz  
Working Indicator: Beeps and LED Indicator

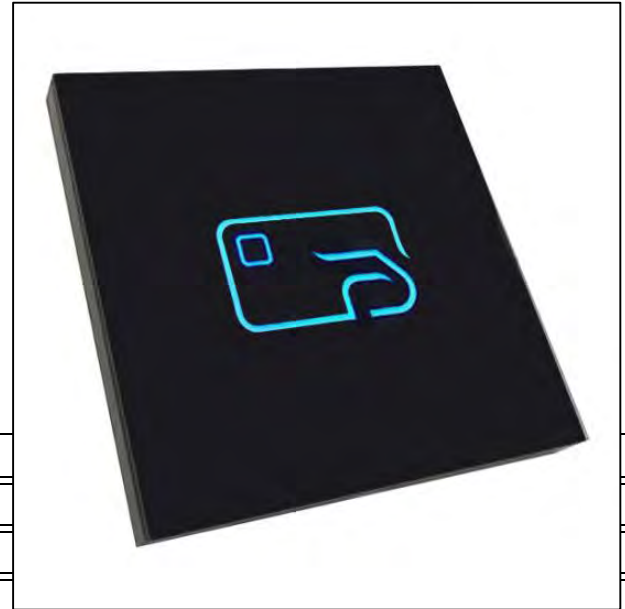


## TEHNIČKA SPECIFIKACIJA U ORIGINALU

Communication	Wiegand26, Wiegand34
Operating voltage	DC9~15V
Working current	≤80mA
Stand-by current	≤30mA
Working frequency	125KHz & 13.56MHz
Operating temperature	-15°C~60°C
Humidity	5%~95%
Reader response	≤100ms
Card reading distance	≤50mm
Transmission distance	<80m (Without electromagnetic interference)
Working Indicator	Beeps and LED Indicator
Color	Black, White
Dimension	86x86x8mm

Date communicate wire diagram:

12V	For		Buzzer	LED	Data0	Data1	GND
●	●	●	●	●	●	●	●
Red	Brown	Blue	Yellow	Orange	Green	White	Black

Schematic diagram:

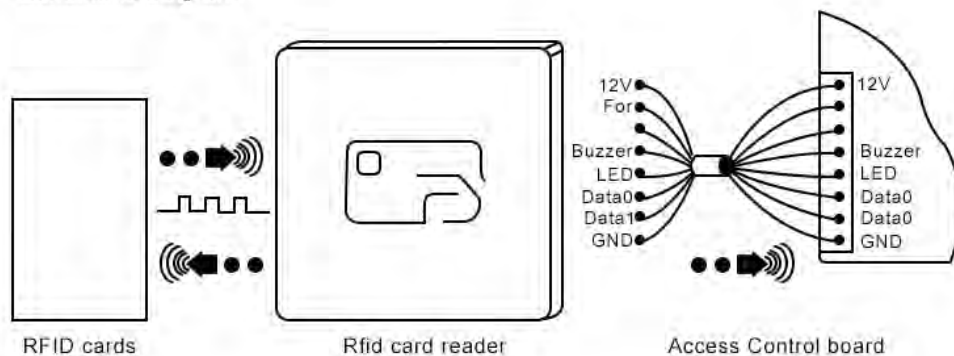

+381 11 355 7599  
+381 63 598 017  
office@aspekt.rs