




KRILNA UVLAČEĆA ("FLAPS") PREPREKA

ŠIFRA PROIZVODA: DAS-Q30

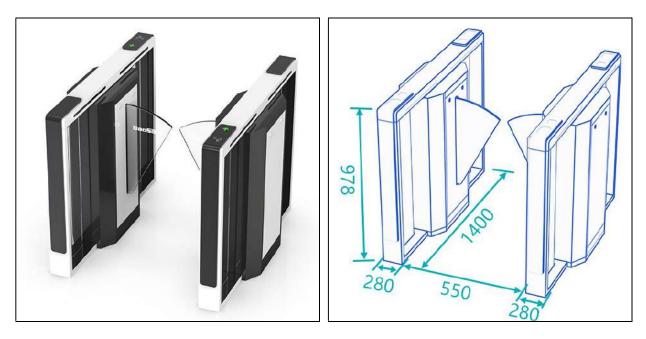

NIŽE U ORIGINALU

Features of Daosafe Optical Flap Turnstile

- Long-life performance, high operation dependability and fast response
- The whole system runs smoothly, low noise, no mechanical impact
- Single directional or Bi-directional is selectable
- Automatic reset function: flap arms will lock automatically within 5s (can be setting) if passenger delay to entry
- When power is off, flap arms will open automatically, which is complying with fire safety requirements
- LED indicator (red means no entry; green → means entry)
- Infrared sensor alarm function, in case of illegal intrusion and reverse intrusion
- Anti-intrusion function, the turnstile is locked automatically until valid opening signal input
- Anti-reverse function, the turnstile alarms if someone wants to entry in the reverse direction
- Anti-trailing function, the turnstile alarm if someone wants to burst in without permission
- In case of emergency, the flap arms will stretch in to open automatically for free passage
- Easy to install and maintain
- 3-year warranty support

Product Details and Dimensions

All the details and dimensions can be customized according to your project site

Integrate Any Access Controllers

Model DAS-Q30 can be integrated with any 3rd access control systems, like card, QR/bar code, biometric, button, remote control, palm vein and so on.



Ništa nije konstantno, osim promene! Heraklit, 480pne.

© 2004. by <u>www.aspektdoo.com</u>



Product Parameters

Model No.	DAS-Q30
Framework Material	Steel + White and black stoving varnish
Swipe Card Panel Material	Tempered glass
Arm Material	Plexiglas-transparency
Dimension	1400 * 280 * 978mm
Weight	65kg/pcs
Passage Width	550mm
Passing Direction	Single directional / Bi-directional
MCBF	12 million
Power Supply	AC220V/110V, 50/60Hz
Operation Voltage	24V DC
Power Consumption	20W
Operation Temperature	-20 °C - 75 °C
Operation Humidity	0 ~ 95% (No freeze)
Working Environment	Indoor / Outdoor
Flow Rate	45 people per minute
Infrared Sensor	6 Pairs (standard)
LED Indicator	Yes
Emergency	Arms will open automatically
Communication	Dry contact, Relay signal, RS485

KRAJ

