


KRILNA BRZA PREPREKA

ŠIFRA PROIZVODA: DAS212

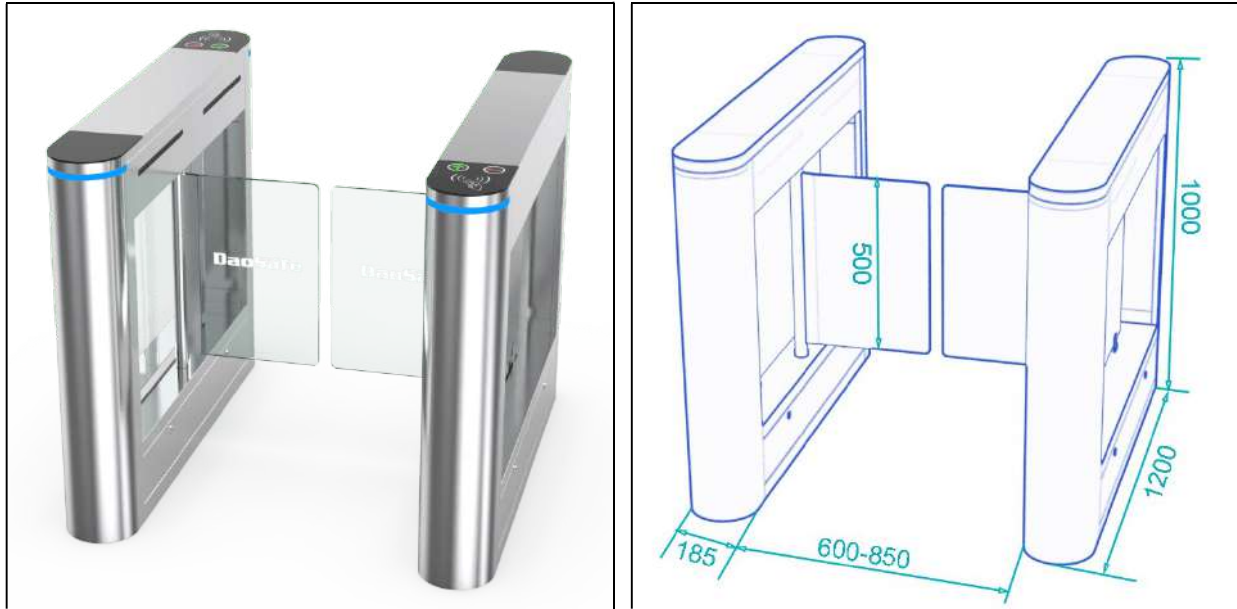

NIŽE U ORIGINALU

Features of Daosafe Optical Swing Turnstile

- Long-life performance, high operation dependability and fast response
- The whole system runs smoothly, low noise, no mechanical impact
- Single directional or Bi-directional is selectable
- Automatic reset function: swing arms will lock automatically within 5s (can be setting) if passenger delay to entry
- When power is off, swing arms will open automatically, which is complying with fire safety requirements
- LED indicator (red — means no entry; green → means entry)
- Infrared sensor alarm function, in case of illegal intrusion and reverse intrusion
- Anti-intrusion function, the turnstile is locked automatically until valid opening signal input
- Anti-reverse function, the turnstile alarms if someone wants to entry in the reverse direction
- Anti-trailing function, the turnstile alarm if someone wants to burst in without permission
- Glass arms will reset automatically if is off position after strong hit. The movement will not be broken or damaged for bump
- It has the fastest open and close speed rate, 0.2 second. The open and close speed rate can be adjusted
- Easy to install and maintain
- 3-year warranty support

Integrate Any Access Controllers

Model DAS212 can be integrated with any 3rd access control systems, like card, QR/bar code, biometric, button, remote control, palm vein and so on.



+381 11 355 7599
+381 63 598 017
office@aspekt.rs

Product Parameters

Model No.	DAS212
Framework Material	304 Stainless Steel+ Plexiglas Arm + Full Glass on side
Arm Material	Plexiglas - transparency
Dimension	Standard: 1200 * 185 * 1000mm, passage width support: 600-850mm Optional: 1300 * 185 * 1000mm, passage width support: 600-900mm
Weight	60kg/pcs, 70kg/pcs
Passing Direction	Single directional / Bi-directional
MCBF	10 million
Power Supply	AC220V/110V, 50/60Hz
Operation Voltage	24V DC
Power Consumption	40W
Operation Temperature	-15 °C - 60 °C
Operation Humidity	0 ~ 95% (No freeze)
Working Environment	Indoor / Outdoor (shelter)
Flow Rate	40 people per minute
LED Indicator	Yes
Infrared Sensor	4 pairs
Emergency	Automatic arm open when power off
Communication	Dry contact, Relay signal, RS485

KRAJ

+381 11 355 7599
+381 63 598 017
office@aspekt.rs