
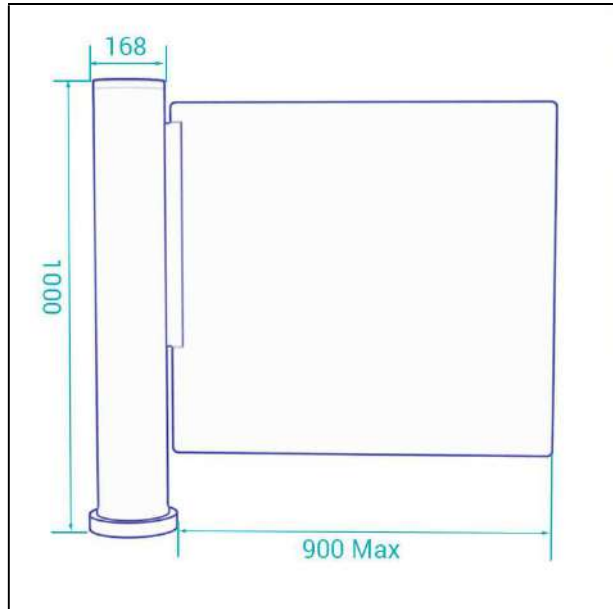


KRILNA BI-DIREKCIONA PREPREKA - CILINDAR

ŠIFRA PROIZVODA: **DAS8000**

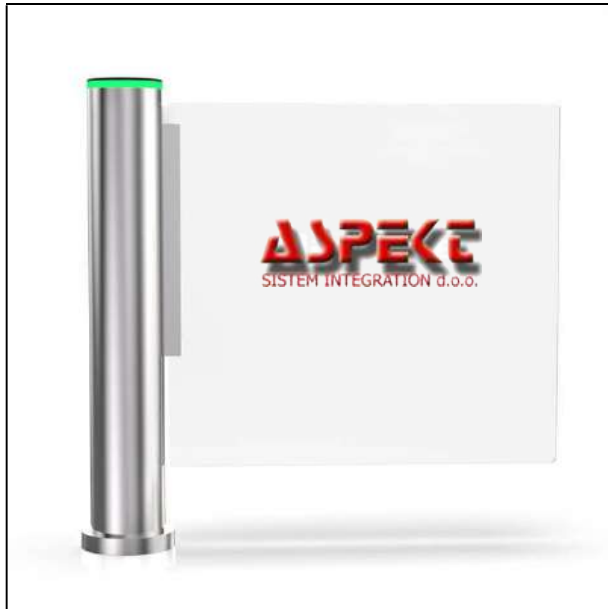

NIŽE U ORIGINALU

Features of Swing Turnstile

- The whole system runs smoothly, long-life performance, high operation dependability and fast response
- Alarm function, in case of illegal intrusion and reverse intrusion (optional)
- Infrared sensor to prevent pinch pedestrians (optional)
- Anti-breakthrough function. The gate is locked automatically until opening signal received
- Automatic reset function. If the user fail to pass within the prescribed time (default time is 5 seconds), the system will cancel the authority of the current user automatically
- When power is off, optical turnstile will open automatically, which is complying with fire safety requirements
- Easy to install and maintain
- 3-year warranty support

Product Parameters

Model No.	DaS8000
Framework Material	304 Full Stainless Steel
Arm Material	Plexiglass / Stainless Steel
Dimension	168 * 1050mm
Weight	60kg/pcs
Passage Width	600-900mm (One passage)
Passing Direction	Single directional / Bi-directional
MCBF	5 million
Power Supply	AC220V/110V, 50/60Hz
Operation Voltage	24V DC
Power Consumption	40W

+381 11 355 7599
+381 63 598 017
office@aspekt.rs

Operation Temperature	-15 °C - 60 °C
Operation Humidity	0 ~ 95% (No freeze)
Working Environment	Indoor / Outdoor
Flow Rate	30 people per minute
LED Indicator	Yes
Infrared Sensor	Optional
Emergency	Automatic arm open when power off
Communication	Dry contact, Relay signal, RS485

Typical installation example



KRAJ



+381 11 355 7599
+381 63 598 017
office@aspekt.rs